



Electronic Automatic Kit 5000



Automatic kit for sliding doors up to 200Kg
Patented system



A single model 5000 electronic automatic kit which covers all manual systems listed below without restrictions of opening side or door size:

- 2120 - 2130 - 2150
- 2320 - 2420
- 3430 - 3530 - 7530

Features and advantages:

- **Reduced installation time:** optimized design of the Kit 5000 provides very simple mechanical mounting and electrical wiring.
- **A passive vertical edgemount** ensures the door and operators safety.
- This automatic kit is controlled by an electronic board and programmable micro processor integrating **numerous features** to fulfil **everyday requirements**.
- All settings (starting, driving force) are made on a **keypad with LCD screen**.

OPTIONS

- Double horizontal safety photocell
- Active edgemount security
- Radar
- Remote control
- Induction loop
- Flashing light
- Heating reflector
- Minus temperature option

The electronic automatic kit 5000 complies with the European Directives and Standards through safety devices according to its use and destination.





Electronic Automatic Kit 5000




- Reduced commissioning time (quick start sheet)
- Simple programming to adjust operation (timer, opening and closing speeds, driving force...)
- Management and auto-control of safety functions (photocells, sensors...)
- Automatic setup of the opening and closing directions of the door
- Smooth and silent operation
- Identical equipment and parts suitable for all door openings and sizes
- Power supply 220 V single-phase
- Operational effort below 150N
- Information codes on display LCD screen: settings and diagnostic assistance
- Cycles counter
- Product in accordance with European Directives and Standards (EN version)




5 operation types available:


- Standard: opening and closing by command order
- Timer 1: opening by command order, automatic closure after timer has lapsed
- Timer 2: opening by command order, automatic closure after timer has lapsed or another command order
- Press and hold closing mode: opening by command order, closing by press and hold command
- Press and hold opening/closing mode: opening and closing by press and hold command

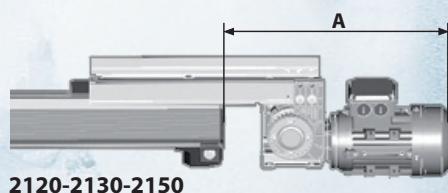


2120-2130-2150

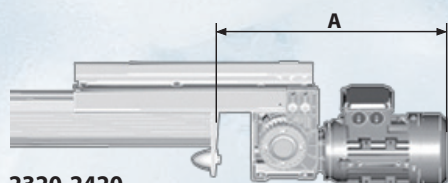


2320-2420

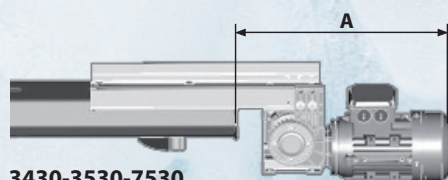


3430-3530-7530



2120-2130-2150



2320-2420



3430-3530-7530

	2120	2130	2150	2320	2420	3430	3530	7530
A	377		347	370	365	355	360	
B	166	183		179		188		
C	R+178			R+168		R+174	R+187	

R = overlapping



FERMOD®



75, rue de Richelieu - 75002 PARIS - FRANCE
Tél. : 33 (0)1 42 96 94 06 - Fax : 33 (0)1 42 86 84 51
<http://www.fermod.com> • e-mail: contact@fermod.com

Siège Social : Senlis (Oise) - Société Anonyme au Capital de 1 004 400 €
RCS Compiègne B 301 468 211 - Siret 301 468 211 00018 - APE 2572 Z

DISTRIBUTOR