


Light Air Curtains

Product Features

- Rounded grid panel with control, anti-corrosion thin-metal cover.
- Remote control or touch switch, adjustable high/ low air speed.
- Adopt optimized motor, reliable operation, operatble 5000 hrs.
- Installation height: 2.5m.
- Available size: 0.9m, 1.2m, 1.5m, 1.8m.

Specifications

| Model | Dimension | Frequency | Voltage | Max Input Power | | Air volume | | Air velocity | Noise | Net weight |
|------------|--------------|-----------|---------|-----------------|------|------------|---------------------|--------------|-------|------------|
| | (mm) | | | (Hz) | (V~) | (W) | (m ³ /h) | | | |
| FM-3009 ZY | 900×200×156 | 50/60 | 220 | 160 | 110 | 1300 | 1100 | 8.5-10 | 54 | 8 |
| FM-3010 ZY | 1000×200×156 | 50/60 | 220 | 180 | 130 | 1400 | 1200 | 8.5-10 | 54 | 8.5 |
| FM-3012 ZY | 1200×200×156 | 50/60 | 220 | 200 | 150 | 1800 | 1600 | 8.5-10 | 56 | 9.5 |
| FM-3015 ZY | 1500×200×156 | 50/60 | 220 | 230 | 180 | 2300 | 2000 | 8.5-10 | 57 | 11 |
| FM-3018 ZY | 1800×200×156 | 50/60 | 220 | 300 | 250 | 2800 | 2600 | 8.5-10 | 58 | 12.5 |

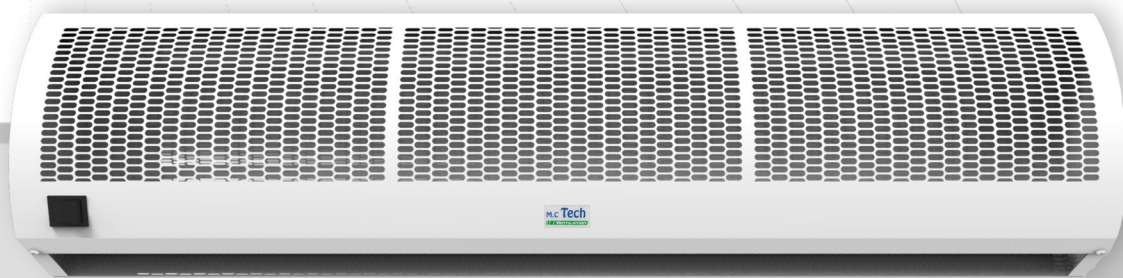

Standard Air Curtains

Product Features

- Honeycomb grid panel with digital control, anti-corrosion thin-metal cover.
- Remote control or touch switch, able to adjust high and low air speed.
- Adopt optimized motor, reliably operate, can continue to 5000 hrs operate without damages.
- Installation height 2.5m – 3.5m.
- Available size: 0.9m, 1m, 1.2m, 1.5m, 1.8m, 2m.

Specifications

| Model | Dimension | Frequency | Voltage | Max Input Power | | Air volume | | Air velocity | Noise | Net weight |
|--------------|--------------|-----------|---------|-----------------|-----|---------------------|------|--------------|-------|------------|
| | (mm) | (Hz) | (V~) | (W) | | (m ³ /h) | | (m/s) | (dB) | (kg) |
| FM3009-Y-2-S | 900×190×210 | 50/60 | 220 | 160 | 110 | 1400 | 1100 | 9-11 | 57 | 10 |
| FM3010-Y-2-S | 1000×190×210 | 50/60 | 220 | 180 | 130 | 1600 | 1300 | 9-11 | 58 | 10.5 |
| FM3012-Y-2-S | 1200×190×210 | 50/60 | 220 | 200 | 150 | 1900 | 1600 | 9-11 | 58 | 12 |
| FM3015-Y-2-S | 1500×190×210 | 50/60 | 220 | 230 | 180 | 2500 | 2000 | 9-11 | 59 | 13.5 |
| FM3018HY | 1800×190×210 | 50/60 | 220 | 300 | 250 | 3200 | 2600 | 9-11 | 60 | 15 |
| FM3020-Y-2-S | 2000×190×210 | 50/60 | 220 | 350 | 300 | 3600 | 2900 | 9-11 | 61 | 17 |



Powerful Air Curtains

Product Features

- Suitable for installation in hotels, supermarket chains, large stadiums, restaurants, airport terminals and other places entrance.
- Fashion simple design, flat cover made in steel or stainless steel with durable structure.
- Adopting updated remote control with high and low speeds operation.
- Aluminum cover.
- Centrifugal air flow fan with stronger air velocity.
- Adopting high-performance pure copper motor, safe and reliable.
- High-speed motor and reliable performance, able to run for 5000 hours without damages.
- Installation height: 3.5m-4m.
- Available size: 0.9m, 1m, 1.2m, 1.5m, 1.8m, 2m.
- Optional Magnetic Switch

Specifications

| Model | Dimension (mm) | Frequency (Hz) | Voltage (V~) | Max Input Power | | Air Volume | | Air Speed | | Noise | | Net Weight (kg) |
|----------|-------------------|-------------------|-----------------|-----------------|-----|---------------------|------|-----------|-----|-------|-----|--------------------|
| | | | | (W) | | (m ³ /h) | | (m/s) | | (dB) | | |
| | | | | HIGH | LOW | HIGH | LOW | HIGH | LOW | HIGH | LOW | |
| FM3509HY | 920x212x225 | 50 | 220 | 230 | 200 | 1200 | 950 | 16 | 13 | <52 | <49 | 13 |
| FM3510HY | 1000x212x225 | 50 | 220 | 250 | 220 | 1300 | 1000 | 16 | 13 | <52 | <49 | 14 |
| FM3512HY | 1200x212x225 | 50 | 220 | 290 | 260 | 1600 | 1300 | 16 | 13 | <53 | <50 | 15.5 |
| FM3515HY | 1530x212x225 | 50 | 220 | 380 | 350 | 2000 | 1630 | 16 | 13 | <55 | <53 | 19.5 |
| FM3518HY | 1800x212x225 | 50 | 220 | 450 | 420 | 2400 | 1950 | 16 | 13 | <57 | <54 | 23.5 |
| FM3520HY | 2000x212x225 | 50 | 220 | 470 | 440 | 2500 | 2000 | 16 | 13 | <58 | <56 | 25.5 |
| FM4009HY | 920x212x225 | 50 | 220 | 300 | 270 | 1500 | 1200 | 20 | 16 | <57 | <54 | 13 |
| FM4010HY | 1000x212x225 | 50 | 220 | 320 | 290 | 1600 | 1250 | 20 | 16 | <57 | <54 | 14 |
| FM4012HY | 1200x212x225 | 50 | 220 | 400 | 370 | 2000 | 1600 | 20 | 16 | <58 | <55 | 15.5 |
| FM4015HY | 1530x212x225 | 50 | 220 | 500 | 470 | 2500 | 2000 | 20 | 16 | <61 | <58 | 19.5 |
| FM4018HY | 1800x212x225 | 50 | 220 | 600 | 570 | 3000 | 2400 | 20 | 16 | <62 | <60 | 23.5 |
| FM4020HY | 2000x212x225 | 50 | 220 | 620 | 590 | 3240 | 2520 | 20 | 16 | <62 | <60 | 25.5 |



Industrial Air Curtains

Product Features

- Luxurious appearance & thin metal cover, dual wind grille designed, a lasting clean body.
- With optimized high speed motor, meets high requirements and particular places.
- Powerfull and smooth airflow.
- Suitable for Storage rooms, health stations, etc.
- Easy to operate.
- Installation height: 6m.
- Available sizes: 0.9m, 1.2m, 1.5m

Specifications

| Model | Dia. Of Wheel | Dimension | Frequency | Voltage | Motor power (W) | | Air volume (m3/h) | | Air velocity (m/s) | | Noise (dB) | | Net weight (kg) |
|----------|---------------|---------------|-----------|---------|-----------------|-----|-------------------|------|--------------------|-----|------------|-----|-----------------|
| | (mm) | (mm) | (Hz) | (V~) | High | Low | High | Low | High | Low | High | Low | |
| FM-1609S | 160 | 900x265x310 | 50 | 220 | 350 | 250 | 3250 | 2550 | 18 | 14 | 57 | 55 | 21.5 |
| FM-1612S | 160 | 1200x265x310 | 50 | 220 | 500 | 370 | 4550 | 3550 | 18 | 14 | 58 | 56 | 30 |
| FM-1615S | 160 | 1500 x265x310 | 50 | 220 | 750 | 550 | 5850 | 4550 | 18 | 14 | 58 | 56 | 38.5 |



Super Industrial Air Curtains

Product Features

- Luxurious appearance & thin metal cover, dual wind grille designed, a lasting clean body.
- With optimized high speed motor, meets high requirements and particular places.
- Cross flow type air flow, aluminum air wheel.
- Powerfull and smooth airflow.
- Suitable for Storage rooms, health stations, etc.
- Easy to operate.
- Installation height: 6-8m.
- Available sizes: 0.9m, 1.2m.

Specifications

| Model | Dia. Of Wheel | Dimension | Frequency | Voltage | Max Input Power | Air volume | Air Velocity | Noise | Net Weight |
|----------|---------------|---------------|-----------|---------|-----------------|------------|--------------|-------|------------|
| | (mm) | (mm) | (Hz) | (V~) | (W) | (m3/h) | (m3/h) | (dB) | (kg) |
| FM-2009S | 200 | 900x370x340 | 50 | 380 | 720 | 4700 | 22 | 72 | 29 |
| FM-2012S | 200 | 1200 x370x340 | 50 | 380 | 1050 | 7350 | 22 | 74 | 35 |



Electrical Heating Air Curtains

Product Features

- Aluminum alloy bar grille for air inlet.
- Schneider electric components .
- Cross flow type air flow.
- Triple protections: overheating protection, resistance changing against voltage and fuse protection.
- 40 seconds Heating protection delay after power off.
- High efficient PTC heater. Fast temperature reaction and long lifetime.
- Installation height 3m.
- Available sizes: 0.9m, 1m, 1.2m, 1.5m, 2m.
- Three Fan speeds and 3 heating steps.

Specifications

| Model | Dimension | Frequency | Voltage | Power (w) | | | PTC Power (KW) | | | Air velocity (m/s) | | | Air volume (m3/h) | | | Noise | Net Weight |
|---------------|--------------|-----------|---------|-----------|-----|-----|----------------|----|----|--------------------|-----|-----|-------------------|------|------|-------|------------|
| | (mm) | (Hz) | (V~) | HI | MI | LO | HI | MI | LO | HI | MI | LO | HI | MI | LO | (dB) | (kg) |
| RM-1209S-3D/Y | 900×224×190 | 50/60 | 380 | 160 | 130 | 110 | 6 | 4 | 2 | 8.5 | 7.5 | 6.5 | 1100 | 1000 | 900 | 2 | 14 |
| RM-1210S-3D/Y | 1000×224×190 | 50/60 | 380 | 180 | 150 | 130 | 6 | 4 | 2 | 8.5 | 7.5 | 6.5 | 1400 | 1200 | 1000 | 2 | 14 |
| RM-1212S-3D/Y | 1200×224×190 | 50/60 | 380 | 200 | 170 | 150 | 8 | 5 | 3 | 8.5 | 7.5 | 6.5 | 1600 | 1550 | 1400 | 3 | 16.5 |
| RM-1215S-3D/Y | 1500×224×190 | 50/60 | 380 | 230 | 200 | 180 | 10 | 7 | 4 | 8.5 | 7.5 | 6.5 | 2100 | 1800 | 1600 | 59 | 18.5 |
| RM-1220S-3D/Y | 2000×224×190 | 50/60 | 380 | 350 | 320 | 300 | 14 | 10 | 6 | 8.5 | 7.5 | 6.5 | 2900 | 2500 | 2300 | 61 | 26.5 |




Refrigeration Stainless Steel Air Curtains

Product Features

- Stainless steel outer cover, easy to clean.
- Suitable for food products factory, cold room, bakery, warehouse etc.
- Professional motor with IP54 protection standard.
- Optimized fan wheel with large air volume and low noise; Compact construction.
- Reliable designed motor operates 5000 hours continuously without any defects.
- Powerful centrifugal fan wheel.
- Installation height: 3.5m-4m.
- Available size: 0.9m, 1m, 1.2m, 1.5m, 1.8m, 2m.

Specifications

| Model | Dimension | Frequency | Voltage | Max input power | Air velocity | Air volume | Noise | Net weight |
|-----------|--------------|-----------|---------|-----------------|--------------|------------|-------|------------|
| | (mm) | (Hz) | (V~) | (W) | (m/s) | (m3/h) | (dB) | (kg) |
| FM-2509LK | 1320×480×365 | 50/60 | 380 | 530 | 22 | 900 | <73 | 22 |
| FM-2510LK | 1420×480×365 | 50/60 | 380 | 550 | 21 | 1000 | <73 | 24.5 |
| FM-2512LK | 1620×480×365 | 50/60 | 380 | 600 | 19 | 1150 | <71 | 27 |
| FM-2515LK | 1920×480×365 | 50/60 | 380 | 670 | 18 | 1400 | <70 | 29 |
| FM-2518LK | 2220×480×365 | 50/60 | 380 | 740 | 17 | 1650 | <70 | 31.5 |
| FM-2520LK | 2420×480×365 | 50/60 | 380 | 800 | 16.5 | 1850 | <70 | 33.5 |

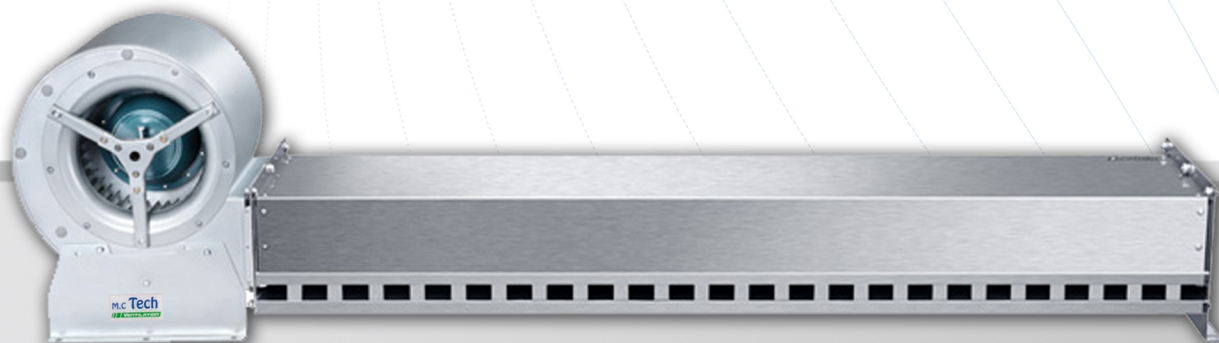

Centrifugal Electrical Heating Air Curtains

Product Features

- Triple protections: overheating protection, piezoresistor protection and fuse protection.
- Schneider electric components .
- Higher speed motor makes better performance.
- Centrifugal fan wheel with powerful wind.
- Installation height: 3.5m – 4m.
- Available sizes: 0.9m, 1.2m, 1.5m.

Specifications

| Model | Dimension | Frequency | Voltage | Motor Power | PTC Power | Air velocity | Air volume | Noise | Net weight |
|---------------|--------------|-----------|---------|-------------|-----------|--------------|------------|-------|------------|
| | (mm) | (Hz) | (V~) | (W) | (KW) | (m/s) | (m3/h) | (dB) | (kg) |
| RM-4009S-3D/Y | 900×350×240 | 50/60 | 380 | 410 | 12 | 11-14 | 1680-1980 | <55 | 26 |
| RM-4012S-3D/Y | 1200×350×240 | 50/60 | 380 | 520 | 16 | 11-14 | 2270-2690 | <56 | 32.5 |
| RM-4015S-3D/Y | 1500×350×240 | 50/60 | 380 | 670 | 20 | 11-14 | 2870-3390 | <58 | 41.5 |
| RM-4009S-D/Y | 900×350×240 | 50/60 | 220 | 410 | 12 | 11-14 | 1680-1980 | <55 | 26 |
| RM-4012S-D/Y | 1200×350×240 | 50/60 | 220 | 520 | 16 | 11-14 | 2270-2690 | <56 | 32.5 |
| RM-4015S-D/Y | 1500×350×240 | 50/60 | 220 | 670 | 20 | 11-14 | 2870-3390 | <58 | 41.5 |



Water Heating Air Curtains

Product Features

- Anti-corrosion metal cover, luxurious and delicate.
- Thermostat control is available, it is able to control many air curtains by one controller.
- Two water inlets spared on the top, which can be alternative according to installation places.
- Exclusive build-in condensate water cup, alternating warm and cold wind for winter and summer use.
- Multilayer coil allows to use of vapor for high heat dispersion.
- Balanced fan wheel and quiet motor.
- Installation height: 3m.
- Available size: 1m, 1.5m, 2m.

Specifications

| Model | Dia. Of Wheel | Dimension | Frequency | Voltage | Max Input Power | Air volume (m3/h) | | | Air velocity | | | Noise | Net Weight | Heating power |
|-------------|---------------|--------------|-----------|---------|-----------------|-------------------|------|------|--------------|----|----|-------|------------|---------------|
| | (mm) | (mm) | (Hz) | (V~) | (W) | HI | MI | LO | HI | MI | LO | (dB) | (kg) | (KW) |
| RM-1210-S/X | 115 | 1000×227×310 | 50/60 | 220 | 180 | 1500 | 1350 | 1150 | 9 | 8 | 7 | 57 | 18 | 8 |
| RM-1215-S/X | 115 | 1500×227×310 | 50/60 | 220 | 230 | 2250 | 2000 | 1750 | 9 | 8 | 7 | 59 | 28 | 12 |
| RM-1220-S/X | 115 | 2000×227×310 | 50/60 | 220 | 350 | 3250 | 2850 | 2550 | 9 | 8 | 7 | 61 | 34 | 16 |




Stainless Steel Air Curtains

Product Features

- Stainless steel outer cover, easy to clean, high performance and fire protected.
- Professional motor manufacturing and imported axis.
- Optimized fan wheel with large air volume and low noise (Compact construction).
- Reliable designed motor operates 5000 hours continuously.
- Powerful centrifugal fan wheel.
- Suitable for food storage, medical, health stations, bakeries, kitchens, hotels etc.
- Installation height: 3.5m-4m.
- Available sizes: 0.9m, 1m, 1.2m, 1.5m, 1.8m, 2m.

Specifications

| Model | Dimension | Frequency | Voltage | Max Input Power | Air volume (m3/h) | | Air Velocity (m3/h) | Noise (dB) | Net Weight (kg) |
|------------|--------------|-----------|---------|-----------------|-------------------|------|---------------------|------------|-----------------|
| | (mm) | | | | (Hz) | (V~) | | | |
| FM-3509S-L | 900×215×240 | 50/60 | 220 | 230 | 1100 | 900 | 13-16 | <52 | 14 |
| FM-3510S-L | 1000×215×240 | 50/60 | 220 | 250 | 1200 | 1000 | 13-16 | <52 | 15 |
| FM-3512S-L | 1200×215×240 | 50/60 | 220 | 290 | 1500 | 1200 | 13-16 | <53 | 18.5 |
| FM-3515S-L | 1500×215×240 | 50/60 | 220 | 380 | 1900 | 1500 | 13-16 | <55 | 25 |
| FM-3518S-L | 1800×215×240 | 50/60 | 220 | 450 | 2280 | 1800 | 13-16 | <57 | 30 |
| FM-3520S-L | 2000×215×240 | 50/60 | 220 | 470 | 2520 | 2100 | 13-16 | <58 | 33.5 |
| FM-4009S-L | 900×215×240 | 50/60 | 220 | 300 | 1400 | 1000 | 16-20 | <57 | 14 |
| FM-4010S-L | 1000×215×240 | 50/60 | 220 | 320 | 1550 | 1100 | 16-20 | <57 | 15 |
| FM-4012S-L | 1200×215×240 | 50/60 | 220 | 400 | 1900 | 1500 | 16-20 | <58 | 18.5 |
| FM-4015S-L | 1500×215×240 | 50/60 | 220 | 500 | 2300 | 1900 | 16-20 | <61 | 25 |
| FM-4018S-L | 1800×215×240 | 50/60 | 220 | 600 | 2850 | 2250 | 16-20 | <63 | 30 |
| FM-4020S-L | 2000×215×240 | 50/60 | 220 | 620 | 3255 | 2855 | 13-16 | <64 | 33.5 |

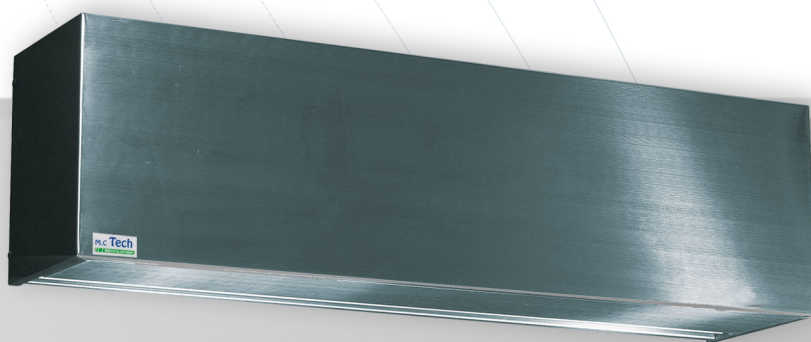


Ceiling Air Curtains

Product Features

- Insert into the ceiling or hanging design. Suitable for glass doors entrance.
- Metal cover and stainless steel air inlet panel, high performance for fire resistance.
- Adopt high speed centrifugal wheel and subtle airflow design, low noise, long lifetime.
- Centrifugal type air flow.
- Installation height: 3.5-4m.
- Available sizes: 0.9m, 1m, 1.2m, 1.5m.

Specifications

| Model | Dimension | Frequency | Voltage | Max Input Power (w) | | Air volume (m3/h) | | Air Velocity | Noise (db) | | Net Weight |
|-----------|--------------|-----------|---------|---------------------|------|-------------------|------|--------------|------------|--------|------------|
| | (mm) | | | (Hz) | (V~) | HI | LO | HI | LO | (m3/h) | |
| FM-3509CS | 900×235×320 | 50/60 | 220 | 230 | 200 | 1100 | 900 | 13-16 | 52 | 49 | 17 |
| FM-3510CS | 1000×235×320 | 50/60 | 220 | 250 | 220 | 1200 | 1000 | 13-17 | 52 | 49 | 19 |
| FM-3512CS | 1200×235×320 | 50/60 | 220 | 290 | 260 | 1500 | 1200 | 13-18 | 53 | 50 | 22 |
| FM-3515CS | 1500×235×320 | 50/60 | 220 | 380 | 350 | 1900 | 1500 | 13-19 | 55 | 52 | 27 |
| FM-4009CS | 900×235×320 | 50/60 | 220 | 300 | 270 | 1400 | 1000 | 16-20 | 57 | 54 | 17 |
| FM-4012CS | 1200×235×320 | 50/60 | 220 | 400 | 370 | 1900 | 1500 | 16-21 | 58 | 55 | 22 |
| FM-4015CS | 1500×235×320 | 50/60 | 220 | 500 | 470 | 2300 | 1900 | 16-22 | 61 | 58 | 27 |

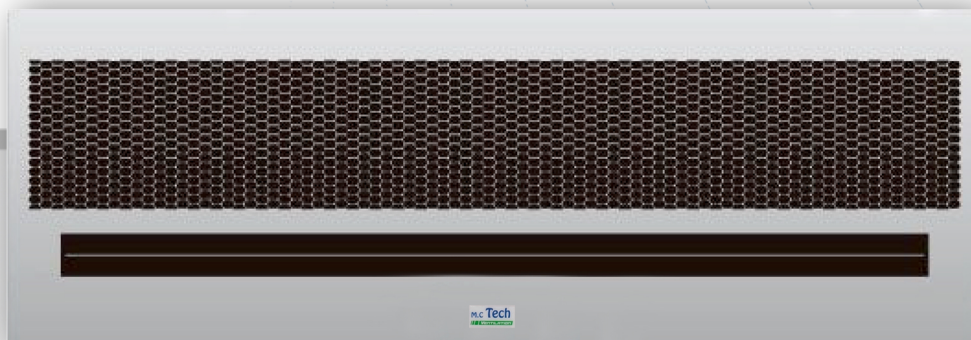

Elevator / Bus Air Curtains

Product Features

- Metal anti-corrosion black cover that protects the product.
- Environmental friendly.
- Lightweight body, compact space, installation convenience and maintenance.
- Optimized high efficient motor.
- It is suitable to install on various elevators and buses.
- Easy to clean and to operate.

Specifications

| Model | Dimension | Frequency | Voltage | Max Input Power | Air volume | Air Velocity | Noise | Net Weight |
|---------|-------------|-----------|---------|-----------------|------------|--------------|-------|------------|
| | (mm) | (Hz) | (V~) | (W) | (m3/h) | (m3/h) | (dB) | (kg) |
| FM-9029 | 410×150×130 | 50/60 | 220 | 40 | 380 | 8.5 | <41 | 2.5 |
| FM-9045 | 585×150×130 | 50/60 | 220 | 55 | 610 | 8.5 | <42 | 3.5 |
| FM-9060 | 750×150×130 | 50/60 | 220 | 85 | 870 | 8.5 | <44 | 5 |



Explosion Proof Air Curtains

Product Features

- Protection Level: IP55.
- Explosion-proof standard: Exd II BT4.
- Insulation level: F.
- Galvanized Zn steel and covered with electrostatic power spraying technology.
- Durable construction.
- Quiet wind wheel and scientific air duct design.
- High speed motor with powerful air-flow.
- Installation height: 3.5M, suitable for refinery, chemical factory and electronics factory.

Specifications

| Model | Dimension | Frequency | Voltage | Max Input Power | Air volume | Air Velocity | Noise | Net Weight |
|----------|--------------|-----------|---------|-----------------|------------|--------------|-------|------------|
| | (mm) | (Hz) | (V~) | (W) | (m3/h) | (m3/h) | (dB) | (kg) |
| FB-1509S | 970×352×265 | 50/60 | 3N 380 | 270 | 2800 | 14 | <62 | 25.5 |
| FB-1512S | 1270×352×265 | 50/60 | 3N 380 | 350 | 3900 | 14 | <64 | 31 |



Super Thin Air Curtains

Product Features

- Square design with honeycomb grid panel, easy for maintenance.
- Light weight metal cover for subtle design.
- Cross flow type air flow.
- Quiet wind wheel.
- High efficient motor.
- Easy to clean and operate.
- Suitable for cold storage and garage doors, factory gates, etc.
- Installation height: 3m.
- Available sizes: 0.9m, 1.2m, 1.5m.

Specifications

| Model | Dimension | Frequency | Voltage | Max Input Power | Air volume | Air Velocity | Noise | Net Weight |
|-----------|--------------|-----------|---------|-----------------|------------|--------------|-------|------------|
| | (mm) | (Hz) | (V~) | (W) | (m3/h) | (m3/h) | (dB) | (kg) |
| FM-1209SK | 900×180×180 | 50/60 | 220 | 160 | 1530 | 12 | 57 | 8.5 |
| FM-1212SK | 1200×180×180 | 50/60 | 220 | 200 | 2070 | 12 | 58 | 11 |
| FM-1215SK | 1500×180×180 | 50/60 | 220 | 230 | 2730 | 12 | 59 | 12 |



Vertical Cold Air Curtains

Product Features

- Luxury model, exclusive performance, high efficient.
- Full steel cabinet.
- Aluminum fan wheel.
- Customized power supply
- Suitable for malls, workshops, garage entrance and places that are unable to install above the entrance.
- Voltage: 220 v~, Frequency: 50 Hz, Air Velocity: 9-10.5 m/s.

Specifications

| Model | Size | Air Volume | | Noise | |
|-----------|--------------|------------|------|-------|-----|
| | (mm) | H | L | H | L |
| FM-LC2000 | 510x424x2000 | 4300 | 3700 | ≤62 | ≤60 |
| FM-LC2500 | 510x424x2500 | 5500 | 4700 | ≤65 | ≤63 |
| FM-LC3000 | 510x424x3000 | 6600 | 5700 | ≤68 | ≤66 |
| FM-LC3500 | 510x424x3500 | 7700 | 6600 | ≤70 | ≤68 |
| FM-LC4000 | 510x424x4000 | 8900 | 7600 | ≤74 | ≤72 |



Vertical Hot Air Curtains

Product Features

- Luxury model, exclusive performance, high efficient.
- Full steel cabinet.
- Aluminum fan wheel.
- Uncharched PTC heater.
- Triple protections: overheating protection, piezoresistor protection and fuse protection.
- Suitable for malls, workshops, garage entrance and places that are unable to install above the entrance.
- Voltage: 380 v~, Frequency: 50 Hz, Air Velocity: 13 m/s.

Specifications

| Model | Size | Air Volume | PTC Heater Power | Noise |
|-----------|--------------|------------|------------------|-------|
| | (mm) | (m3/h) | (kw) | (dB) |
| RM-LC2000 | 510x430x2000 | 5600 | 20 | <60 |
| RM-LC2500 | 510x430x2500 | 6400 | 30 | <63 |
| RM-LC3000 | 510x430x3000 | 7000 | 45 | <66 |
| RM-LC3500 | 510x430x3500 | 7800 | 50 | <68 |
| RM-LC4000 | 510x430x4000 | 8400 | 60 | <72 |

