

OUTDOOR CONDENSING UNITS ODCU3

PRODUCT CATALOG



NEW OUTDOOR CONDENSING UNITS

WWW.TECUMSEH.COM

Tecumseh ODCU3

About Tecumseh Products India

Tecumseh Products India a Subsidiary of Tecumseh Products Company LLC is a leading global manufacturer of hermetic reciprocating, rotary and scroll compressors ranging in capacity from 1/15th to 30 horsepower, as well as offering a complete line of condensing units and systems for use in residential and commercial refrigeration and air conditioning applications.

Tecumseh ODCU

Built on 85 years of climate control expertise, our new Outdoor Condensing Units ODCU3 designed specifically for commercial refrigeration applications for cold rooms, process cooling, retail refrigeration and industrial chillers. Available with reciprocating compressors technology and manufactured in India under strict specifications with the latest advancements in technology for low and high temperature applications.

HIGH AMBIENT COMPATIBLE

- Optimum grill design increases airflow, generously sized coils for improved TD's, capacity, efficiency, reliability & intended to work at a most extreme ambient temperature of 43°C

SPACE EFFICIENT

- Compact bases scaled to capacity and all in one service across allows side by side installation of multiple units.

AESTHETICALLY DESIGNED

- Designed aesthetically & powder coated body to give it a lustrous touch

SILENT OPERATION

- Low noise fan for quiet operations

REFRIGERANT OPTIONS

- Available in R-404A, R-134A, R-407C & R22

APPLICATION

- Wide range of applications from low to high temperature application

Condensing Unit

EN13215	LBP	HP/MHBP
Evaporating Temperature	-35°C	+5°C
Ambient Temperature	+32°C	+32°C
Return Gas	+20°C	+20°C
Sub-cooling	3K	3K

MODEL NOMENCLATURE

CDU	4	5	22	Z	XG	S
OUTDOOR TYPE CONDENSING UNIT	Application 2 = Low Back 4 = High Back	CAPACITY No of Digits in Cooling Capacity	CAPACITY First Two Digits in Cooling Capacity 24000BTU/Hr @ 60 Hz	Refrigerant E = R-22 Z = R-404A	Voltage Code GF,XG,XN, ..etc	Accessories S-Standard FB-Fully Built

- Condensing unit name: "Outdoor Condensing Units"
- Application: 2 = Low temperature application, 4 = High/Medium temperature application,
- Number of digits of cooling capacity
- First two digits in Rating Point Capacity @ 60 Hz (eg. 46,000 Btu/h)
- Refrigerant: Z = R-404A, C = R-407C, W = R 407C / R 22, Y=R 134a
- Voltage Code XG,XN , etc
- S= Standard Configuration , FB= Fully Built Configuration

PERFORMANCE DATA

RECIPROCATING TECHNOLOGY - LOW TEMP APPLICATION

R-404A

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)						Amb. Temp. 35°C Evap. Temp. -25°C		Current (A)	
			-40	-35	-30	-25	-20	-15	Power Input (W)	COP (W/W)	RLA	LRA
CDU2470Z	Outdoor	35	-370	886	1166	1492	1867	2292	1257	0.93	1Ø= 7.9	1Ø= 55
		38	-	826	1093	1404	1761	2167				
		43	-	-	972	1257	1585	1956				
CDU2495Z	Outdoor	35	653	1073	1572	2154	2317	3253	1612	0.93	1Ø= 8.9 3Ø= 3.1	1Ø= 65 3Ø= 29
		38	558	962	1442	1901	2236	2942				
		43	-	780	1225	1742	2132	2689				
CDU2512Z	Outdoor	35	1099	1663	2128	2890	3440	4668	2105	1.10	1Ø= 11 3Ø= 402	1Ø= 71 3Ø= 60
		38	969	1514	1955	2690	3511	4404				
		43	-	1266	1665	2352	3022	3962				
CDU2516Z	Large	35	1309	2022	2855	3798	4835	1309	2646	1.55	4.8	45.5
		38	1143	1822	2613	3507	4493	1143				
		43	875	1497	2217	3031	3931	875				
CDU2522Z	Large	35	1914	2756	3745	4850	6067	1914	3298	1.56	5.7	56
		38	1720	2541	3484	4543	5710	1720				
		43	1402	2176	3056	4040	5126	1402				
CDU2525Z	Large	35	2095	3034	4084	5237	6478	2095	3731	1.49	6.3	56
		38	1746	2637	3627	4708	5872	1746				
		43	1541	2404	3356	4395	5511	1541				

* Comp RLA: Rated Load Ampere MCC: Maximum Continuous Current LRA: Lock Rotor Ampere

RECIPROCATING TECHNOLOGY - HIGH/MEDIUM TEMP APPLICATION

(GAS CHARGED) R-22

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)					Amb. Temp. 35°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	Power Input (W)	COP (W/W)	RLA	LRA
CDS5522E	Outdoor	35	2343	3012	3537	4324	5227	1688	2.10	1Ø= 8.9 3Ø= 3.1	1Ø= 65 3Ø= 29
		38	2194	2830	3331	4077	4930				
		43	-	2526	2984	3660	4433				
CDS5530E	Outdoor	35	2823	3629	4170	5210	6297	1867	2.23	1Ø= 8.9 3Ø= 3.1	1Ø= 65 3Ø= 29
		38	2643	3410	3927	4912	5940				
		43	-	3043	3519	4410	5341				

RECIPROCATING TECHNOLOGY - HIGH/MEDIUM TEMP APPLICATION

R-22

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)					Amb. Temp. 35°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	Power Input (W)	COP (W/W)	RLA	LRA
CDS5522E	Outdoor	35	2343	3012	3537	4324	5227	1688	2.10	1Ø= 8.9 3Ø= 3.1	1Ø= 65 3Ø= 29
		38	2194	2830	3331	4077	4930				
		43	-	2526	2984	3660	4433				
CDS5530E	Outdoor	35	2823	3629	4170	5210	6297	1867	2.23	1Ø= 8.9 3Ø= 3.1	1Ø= 65 3Ø= 29
		38	2643	3410	3927	4912	5940				
		43	-	3043	3519	4410	5341				
CDS5535E	Outdoor	35	3524	4482	5083	6301	7478	2435	2.09	1Ø= 14.2 3Ø= 5.3	1Ø= 92 3Ø= 45
		38	3309	4228	4801	5911	7185				
		43	-	3798	4353	5399	6381				
CDS5542E	Outdoor	35	3964	4935	5916	8153	9480	2687	2.20	3Ø= 6.0	3Ø= 60
		38	-	4723	5604	6845	8663				
		43	-	4245	4846	6567	8046				

* Comp RLA: Rated Load Ampere MCC: Maximum Continuous Current LRA: Lock Rotor Ampere

RECIPROCATING TECHNOLOGY - HIGH/MEDIUM TEMP APPLICATION

R-22

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)					Amb. Temp. 35°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	Power Input (W)	COP (W/W)	RLA	LRA
CDU4522E	Outdoor	35	2343	3012	3537	4324	5227	1688	2.10	1Ø= 8.9 3Ø= 3.1	1Ø= 65 3Ø= 29
		38	2194	2830	3331	4077	4930				
		43	-	2526	2984	3660	4433				
CDU4530E	Outdoor	35	2823	3629	4170	5210	6297	1867	2.23	1Ø= 8.9 3Ø= 3.1	1Ø= 65 3Ø= 29
		38	2643	3410	3927	4912	5940				
		43	-	3043	3519	4410	5341				
CDU4538E	Outdoor	35	3596	4573	5187	6430	7630	2435	2.13	1Ø= 14.2 3Ø= 5.3	1Ø= 92 3Ø= 45
		38	3376	4314	4899	6032	7332				
		43	-	3876	4442	5510	6512				
CDU4542E	Outdoor	35	3964	4935	5916	8153	9480	2687	2.20	3Ø= 6.0	3Ø= 60
		38	-	4723	5604	6845	8663				
		43	-	4245	4846	6567	8046				

* Comp RLA: Rated Load Ampere MCC: Maximum Continuous Current LRA: Lock Rotor Ampere

RECIPROCATING TECHNOLOGY - HIGH/MEDIUM TEMP APPLICATION

R-404A

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)					Amb. Temp. 35°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	Power Input (W)	COP (W/W)	RLA	LRA
CDU4522Z	Outdoor	35	2547	3137	3762	4412	5075	1652	2.28	1Ø= 11.45 3Ø= 3.2	1Ø= 60 3Ø= 20
		38	2385	2948	3543	4160	4787				
		43	-	2631	3175	3735	4304				
CDU4532Z	Outdoor	35	3069	3780	4533	5316	6114	2151	2.11	1Ø= 17.6 3Ø= 4.12	1Ø= 85 3Ø= 30
		38	2873	3552	4269	5012	5767				
		43	-	3170	3825	4500	5185				
CDU4538Z	Outdoor	35	3909	4764	5638	6561	7408	2745	2.05	1Ø= 18.8 3Ø= 6.1	1Ø= 126 3Ø= 45
		38	3670	4494	5325	6155	7118				
		43	-	4037	4828	5622	6322				
CDU4544Z	Outdoor	35	4309	5141	6430	8319	9204	3261	1.97	3Ø= 6.7	3Ø= 42
		38	4046	4920	6091	6985	8411				
		43	-	4422	5267	6701	7812				

*Comp RLA: Rated Load Ampere MCC: Maximum Continuous Current LRA: Lock Rotor Ampere

RECIPROCATING TECHNOLOGY - HIGH TEMP APPLICATION

R-404A

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)					Amb. Temp. 32°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	Power Input (W)	COP (W/W)	RLA	LRA
CDU4573Z	Outdoor	35	7688	9359	11148	13037	15012	5532	2.13	11.6	56
		38	7206	8803	10503	12295	14165				
		43	6397	7869	9424	11053	12752				

RECIPROCATING TECHNOLOGY -HIGH/MEDIUM TEMP APPLICATION

R-134a

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)					Amb. Temp. 38°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	Power Input (W)	COP (W/W)	RLA	LRA
CDU4518Y	Outdoor	35	1653	2162	2738	3379	4084	1202	2.16	1Ø= 6.75 3Ø= 2.5	1Ø= 40 3Ø= 18
		38	1551	2040	2595	3213	3892				
		43	-	1848	2366	2945	3583				
CDU4525Y	Outdoor	35	2164	2820	3550	4350	5211	1584	2.13	1Ø= 9.5 3Ø= 3.38	1Ø= 52 3Ø= 26
		38	2031	2665	3370	4145	4978				
		43	-	2410	3075	3805	4591				

SCROLL TECHNOLOGY - HIGH TEMP APPLICATION

R 404A/R 22

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)					Amb. Temp. 32°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	Power Input (W)	COP (W/W)	RLA	LRA
CDU4536Z	Outdoor	35	4187	4946	5759	6622	7526	2384	2.53	1 Ø=11.8 3 Ø=5.1	1 Ø=76 3 Ø=45
		38	3986	4709	5481	6298	7154				
		43	3629	4291	4993	5734	6510				
CDU4548Z	Outdoor	35	6219	7354	8605	9971	11452	3584	2.51	3 Ø=7.0	3 Ø=60
		38	5930	7008	8195	9493	10903				
		43	5432	6414	7497	8682	9975				
CDU4560Z	Outdoor	35	7582	8957	10459	12085	13831	4172	2.62	3 Ø=8.0	3 Ø=60
		38	7230	8540	9971	11520	13186				
		43	6599	7797	9104	10520	12048				
CDU4572Z	Outdoor	35	8755	10320	12017	13832	15758	5353	2.34	3 Ø=9.4	3 Ø=65
		38	8330	9825	11448	13189	15043				
		43	7561	8930	10423	12036	-				

SCROLL TECHNOLOGY - HIGH TEMP APPLICATION

R 407C/R22

Model	Platform	Ambient Temp. (°C)	Capacity (W) Evaporating Temperature (°C)						Amb. Temp. 32°C Evap. Temp. -5°C		Current (A)	
			-15	-10	-5	0	5	7.2	Power Input (W)	COP (W/W)	RLA	LRA
CDU5570W	Outdoor	35	7448	8598	10748	12730	15238	16483	4446	2.42	9.1	65
		38	6992	8113	9966	12075	14488	15685				
		43	-	7610	9367	11391	13699	14820				

SPECIFICATION

RECIPROCATING TECHNOLOGY -HIGH TEMP APPLICATION

R 22

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) CDU	Weight(kg) ODCU- Standard (S)	Weight(kg) ODCU-Fullt Built (FB)
		Size (mm)	Power (W)	Suction	Liquid	Length	Width	Height			
CDU4515EGE	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	870	380	605	46	47	52
CDU4522EGE CDU4522EGF	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	870	380	605	46	47	52
CDU4530EGH CDU4530EGF	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	870	380	605	46	47	52
CDU4538EXC CDU4538EGF	Outdoor	500	380W	15.8 (5/8")	9.52 (3/8")	968	436	825	63	68	75
CDU4542EXG	Outdoor	500	380W	15.8 (5/8")	9.52 (3/8")	968	436	825	64	68	75

RECIPROCATING TECHNOLOGY -HIGH TEMP APPLICATION

R-407C

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) CDU	Weight(kg) ODCU- Standard (S)
		Size (mm)	Input (Each)	Suction	Liquid	Length	Width	Height		
CDU4514CGE CDU4514CGF	Outdoor	445	110W	12.7 (5/8")	9.52 (3/8")	860	310	605	46	47
CDU4522CGH CDU4522CGF	Outdoor	445	110W	12.7 (5/8")	9.52 (3/8")	860	310	605	46	47
CDU4530CGH CDU4530CGF	Outdoor	445	110W	12.7 (5/8")	9.52 (3/8")	860	310	605	46	47
CDU4535CXC CDU4535CGF	Outdoor	500	110W	15.8 (5/8")	9.52 (3/8")	985	330	825	64	68
CDU4540CGF	Outdoor	500	380W	15.8 (5/8")	9.52 (3/8")	985	330	825	64	68

RECIPROCATING TECHNOLOGY -HIGH/MEDIUM TEMP APPLICATION

R-134a

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) CDU	Weight(kg) ODCU- Standard (S)	Weight(kg) ODCU-Fullt Built (FB)
		Size (mm)	Input (Each)	Suction	Liquid	Length	Width	Height			
CDU4515YGE	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	46	47	52
CDU4518YXC CDU4518YXG	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	46	47	52
CDU4525YXC CDU4525YXG	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	46	47	52

RECIPROCATING TECHNOLOGY -HIGH/MEDIUM TEMP APPLICATION

R-404A

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) ODCU- Standard (S)	Weight(kg) ODCU-Fullt Built (FB)
		Size (mm)	Input (Each)	Suction	Liquid	Length	Width	Height		
CDU4516ZXN CDU4516ZXG	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	47	52
CDU4522ZXN CDU4522ZXG	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	47	52
CDU4532ZXN CDU4532ZXG	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	47	52
CDU4538ZXN CDU4538ZXG	Outdoor	500	380W	15.8 (5/8")	9.52 (3/8")	985	330	825	68	75
CDU4544ZXG	Outdoor	500	380W	15.8 (5/8")	9.52 (3/8")	985	330	825	68	75

RECIPROCATING TECHNOLOGY - LOW TEMP APPLICATION

R-404A

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) ODCU- Standard (S)	Weight(kg) ODCU-Fullt Built (FB)
		Size (mm)	Input (Each)	Suction	Liquid	Length	Width	Height		
CDU2470ZGE	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	47	52
CDU2495ZGE CDU2495ZXG	Outdoor	445	110W	15.8 (5/8")	9.52 (3/8")	860	310	605	47	52
CDU2512ZXC CDU2512ZTZ	Outdoor	500	380W	15.8 (5/8")	9.52 (3/8")	985	330	825	68	75

RECIPROCATING TECHNOLOGY - LOW TEMP APPLICATION

R-404A

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) Standard	Weight(kg) Fullt Built
		Size	Input	Suction	Liquid	Length	Width	Height		
CDU2516Z	Outdoor	2 x 450	250W	(7/8")	(1/2")	915	436	1186	90	100
CDU2522Z	Outdoor	2 x 450	250W	(7/8")	(1/2")	915	436	1186	90	100
CDU2525Z	Outdoor	2 x 450	250W	(7/8")	(1/2")	915	436	1186	90	100

RECIPROCATING TECHNOLOGY - HIGH TEMP APPLICATION

R 407C/R22

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) Standard	Weight(kg) Fullt Built
		Size	Input	Suction	Liquid	Length	Width	Height		
CDU4573Z /CDU4573T	Outdoor	2 x 450	250W	(7/8")"	(1/2")	915	436	1186	90	100

RECIPROCATING TECHNOLOGY - HIGH TEMP APPLICATION

R 404A

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) Standard	Weight(kg) Fullt Built
		Size	Input (Each)	Suction	Liquid	Length	Width	Height		
CDU5570W	Outdoor	2 x 450	250W	(7/8")"	(1/2")	915	436	1186	90	100

SCROLL TECHNOLOGY - HIGH TEMP APPLICATION

R 407C/R22

Model	Platform	Fan		Diameter of connection(mm)		Dimensions (mm)			Weight(kg) Standard	Weight(kg) Fullt Built
		Size	Input (Each)	Suction	Liquid	Length	Width	Height		
CDU4536Z	Outdoor	1 x 450	250W	"15.8 (5/8")"	"9.52 (3/8")"	915	436	792	68	75
CDU4560Z	Outdoor	2 x 450	250W	(7/8")"	(1/2")	915	436	1186	90	100
CDU4572Z	Outdoor	2 x 450	250W	(7/8")"	(1/2")	915	436	1186	90	100

SCOPE OF SUPPLY - STANDARD (HIGH TEMP APPLICATION)

R 22

Reciprocating	CDU4515EGE	CDU4522EGE CDU4522EGF	CDU4530EGH CDU4530EGF	CDU4538EXC CDU4538EGF	CDU4542EXG	CDU4515EGE-S	CDU4522EGE-S CDU4522EGF-S	CDU4530EGH-S CDU4530EGF-S	CDU4538EXC-S CDU4538EGF-S	CDU4542EXG-S	CDU4522EGE-FB CDU4522EGF-FB	CDU4530EGH-FB CDU4530EGF-FB	CDU4538EXC-FB CDU4538EGF-FB	CDU4542EXG-FB
Filter Drier	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Fan With Grill	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
HP/LP (Catridge)						✓	✓	✓	✓	✓	✓	✓	✓	✓
Moisture Indicator											✓	✓	✓	✓
Solenoid Valve											✓	✓	✓	✓
Liquid Receiver											✓	✓	✓	✓
Service Valves	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

SCOPE OF SUPPLY - STANDARD (HIGH TEMP APPLICATION)

R 407C

Reciprocating	CDU4514CGE-S CDU4514CGF-S	CDU4522CGH-S CDU4522CGF-S	CDU4530CGH-S CDU4530CGF-S	CDU4535CXC-S CDU4535CGF-S	CDU4540CGF-S
Filter Drier	✓	✓	✓	✓	✓
Fan With Grill	✓	✓	✓	✓	✓
HP/LP (Catridge)	✓	✓	✓	✓	✓
Moisture Indicator					
Solenoid Valve					
Liquid Receiver					
Service Valves	✓	✓	✓	✓	✓

SCOPE OF SUPPLY-STANDARD
(HIGH/MEDIUM TEMP APPLICATION)

R 404A

Reciprocating	CDU4516ZXN-S CDU4516ZXG-S	CDU4522ZXN-S CDU4522ZXG-S	CDU4532ZXN-S CDU4532ZXG-S	CDU4538ZXN-S CDU4538ZXG-S	CDU4544ZXG-S	CDU4516ZXN-FB CDU4516ZXG-FB	CDU4522ZXN-FB CDU4522ZXG-FB	CDU4532ZXN-FB CDU4532ZXG-FB	CDU4538ZXN-FB CDU4538ZXG-FB	CDU4544ZXG-FB
Filter Drier	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Fan With Grill	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
HP/LP (Catridge)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Moisture Indicator						✓	✓	✓	✓	✓
Solenoid Valve						✓	✓	✓	✓	✓
Liquid Receiver						✓	✓	✓	✓	✓
Service Valves	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

SCOPE OF SUPPLY - STANDARD (HIGH/MEDIUM TEMP APPLICATION) **R 134a**

Reciprocating	CDU4515YGE-S	CDU4518YXC-S CDU4518YXG-S	CDU4525YXC-S CDU4525YXG-S	CDU4515YGE-FB	CDU4518YXC-FB CDU4518YXG-FB	CDU4525YXC-FB CDU4525YXG-FB
Filter Drier	✓	✓	✓	✓	✓	✓
Fan With Grill	✓	✓	✓	✓	✓	✓
HP/LP (Catridge)	✓	✓	✓	✓	✓	✓
Moisture Indicator				✓	✓	✓
Solenoid Valve				✓	✓	✓
Liquid Receiver				✓	✓	✓
Service Valves	✓	✓	✓	✓	✓	✓

Scope Of Supply - Standard (Low Temp Application)

R 404A

Reciprocating	CDU2470ZGE-S	CDU2495ZGE-S CDU2495ZXG-S	CDU2512ZXC-S CDU2512ZXG-S	CDU2516ZTZ-S	CDU2522ZTZ-S	CDU2525ZTZ-S	CDU2470ZGE-FB	CDU2495ZGE-FB CDU2495ZXG-FB	CDU2512ZXC-FB CDU2512ZXG-FB	CDU2516ZTZ-FB	CDU2522ZTZ-FB	CDU2525ZTZ-FB
Filter Drier	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Fan With Grill	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
HP/LP (Catridge)	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓
Moisture Indicator							✓	✓	✓	✓	✓	✓
Solenoid Valve							✓	✓	✓	✓	✓	✓
Liquid Receiver							✓	✓	✓	✓	✓	✓
Service Valves	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓

SCOPE OF SUPPLY- FULLY BUILT (HIGH TEMP APPLICATION) **R 407C/R22**


Scroll	CDU5570WXG-S
Filter Drier	✓
Fan With Grill	✓
HP/LP	✓
Moisture Indicator	-
Solenoid Valve	-
Liquid Receiver	-
Service Valves	✓

SCOPE OF SUPPLY - FULLY BUILT (MEDIUM TEMP APPLICATION) **R 404A**

Reciprocating	CDU4573TTZ-S	CDU4573TTZ-R22	CDU4573TTZ-FB
Filter Drier	✓	✓	✓
Fan With Grill	✓	✓	✓
HP/LP	✓	✓	✓
Moisture Indicator	-	-	✓
Solenoid Valve	-	-	✓
Liquid Receiver	-	-	✓
Service Valves	✓	✓	✓

Scroll	CDU4536ZXN-S CDU4536ZXG-S	CDU4548ZXG-S	CDU4560ZXG-S	CDU4572ZXG-S	CDU4536ZXN-FB CDU4536ZXG-FB	CDU4548ZXG-FB	CDU4560ZXG-FB	CDU4572ZXG-FB
Filter Drier	✓	✓	✓	✓	✓	✓	✓	✓
Fan With Grill	✓	✓	✓	✓	✓	✓	✓	✓
HP/LP (Catridge)	✓	✓	✓	✓	✓	✓	✓	✓
Moisture Indicator					✓	✓	✓	✓
Solenoid Valve					✓	✓	✓	✓
Liquid Receiver					✓	✓	✓	✓
Service Valves	✓	✓	✓	✓	✓	✓	✓	✓

TECHNICAL DRAWINGS

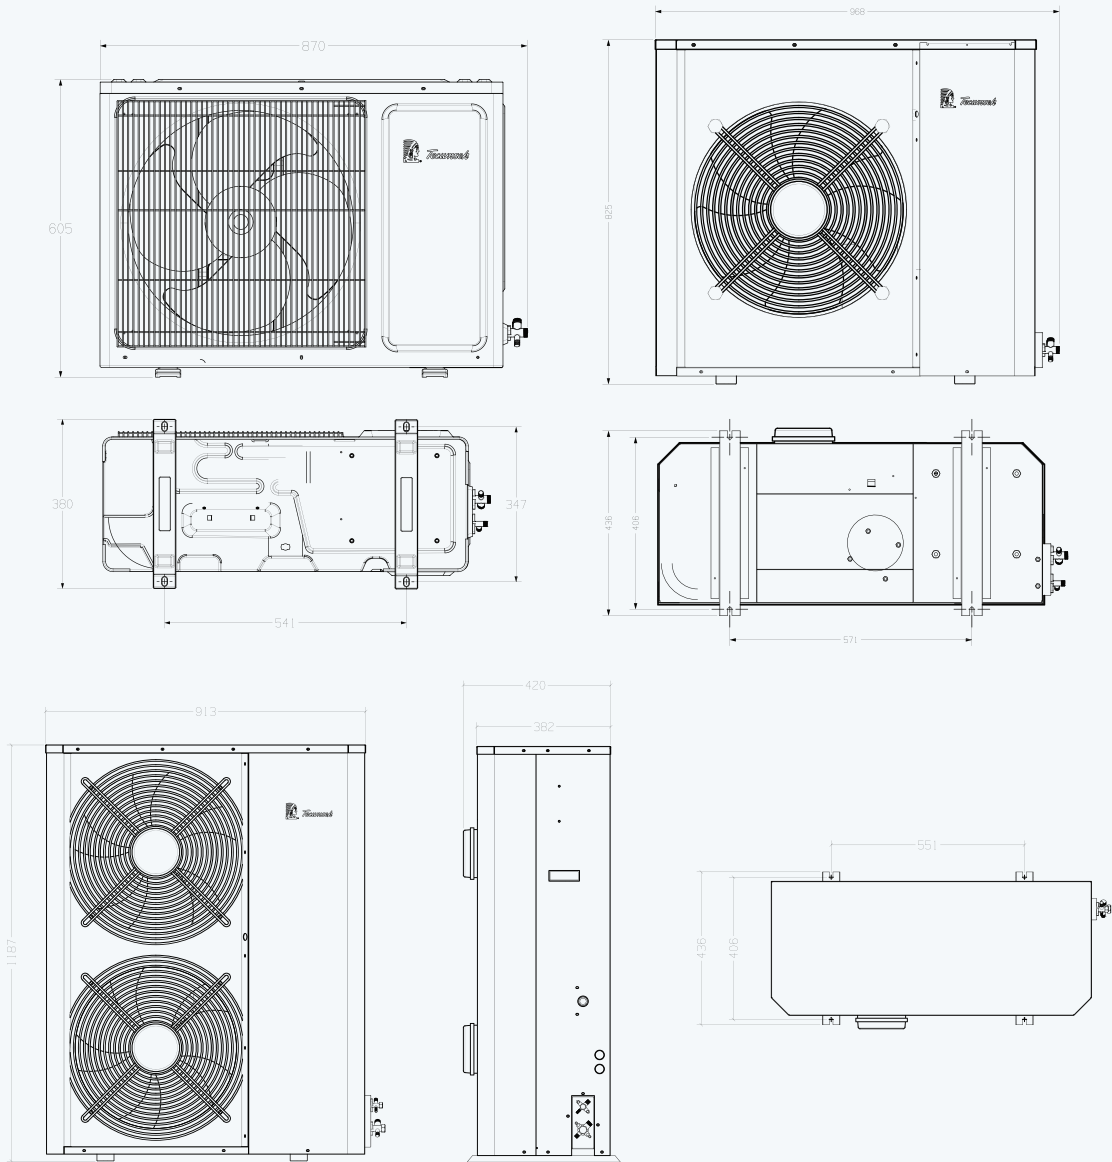



Note: As our Policy of continuous improvement, data and other specifications are subject to change without prior notice.



Tecumseh

TECUMSEH PRODUCTS INDIA PRIVATE LIMITED

Survey No. 687/P and 784/P,
Kistapur Village, Medchal,
Malkajgiri District, Hyderabad,
Telangana - 501 401, India